

DUCHESNE COUNTY MONUMENT SURVEY RECORD



T2S

R2W R1W

SEC 12 SEC 7
SEC 13 SEC 18

U.S.B.&M.


R-1



SCALE: 1"=30'



LINE	BEARING	DISTANCE
L1	S 36°46'50" W	55.30'
L2	N 81°18'07" W	51.42'
L3	N 52°42'45" W	42.20'
L4	N 46°00'24" W	43.02'
L5	N 42°59'54" W	38.52'
L6	N 59°44'28" E	56.72'
L7	S 55°35'48" E	58.23'

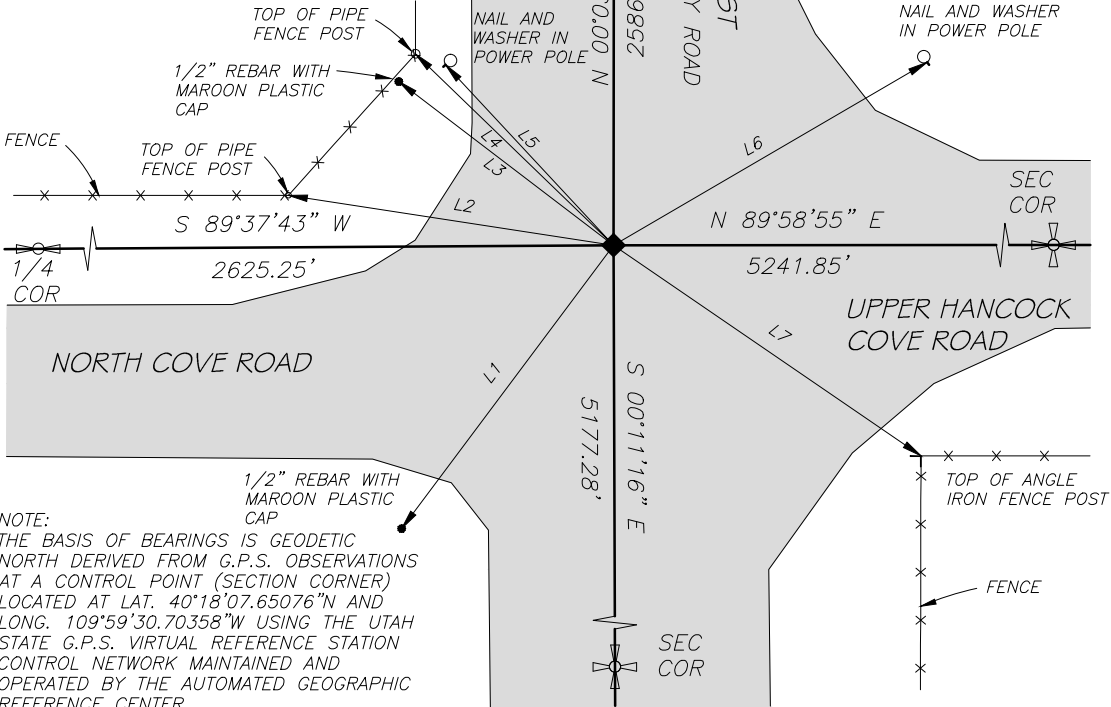

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND RAIL ROAD SPIKE
APPROXIMATELY 5" BELOW THE
ASPHALT SURFACE USING PREVIOUS
TIES AT POSITION OF SECTION
CORNER



PHOTO OF MONUMENT

DESCRIPTION OF MONUMENT AND ACCESSORIES
ESTABLISHED TO PERPETUATE THE ORIGINAL
LOCATION OF THE CORNER

LEFT RR SPIKE IN PLACE AND USED
REBARS, NAIL AND WASHERS, AND
ADJOINING CORNERS AS REFERENCE
POINTS AS SHOWN

STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)
NAD83 UTAH CENTRAL ZONE
N: 7287335.262
E: 2045131.502
NAVD88 EL: 5191.89'



PHOTO OF MONUMENT FACING NORTH

LATITUDE: 40°18'59.77265" N
LONGITUDE: 110°02'54.76740" W
ELLIPSOID HEIGHT: 5135.45'
(GEOID 03 CONUS)
PUBLIC LAND SURVEY SYSTEM GCDB ID NO.
UT300020S0010W0_100500

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do
hereby certify that I have performed or reviewed the work done on the
diagrammed corner as reported on this recordation form and approve same

Date 11 DEC '17

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

